

## **ALISAN PROP**

**PRODUCT BROCHURE**



# Alisan Prop



World Trade Center building, Paraguay

Alsina has a range of telescopic post-shores with measurements between 4'-11" and 19'-8 1/4" (1.5 and 6 meters) that can be used with all the formwork systems, whether from Alsina or other manufacturers.

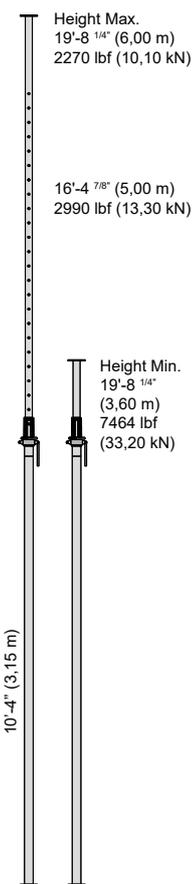
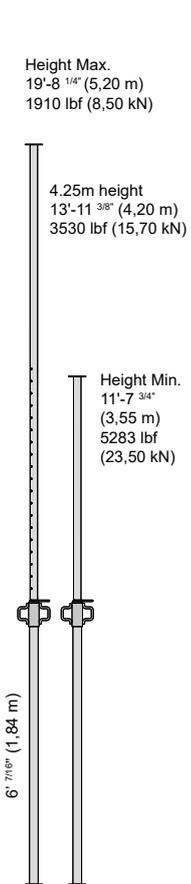
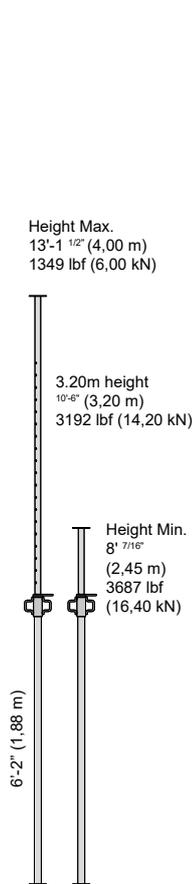
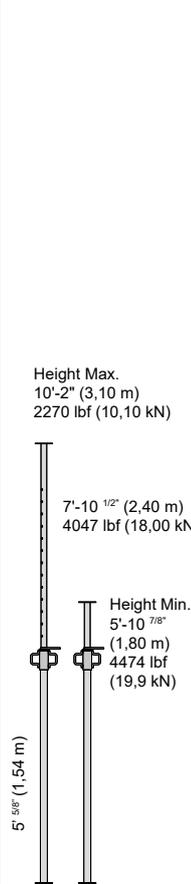
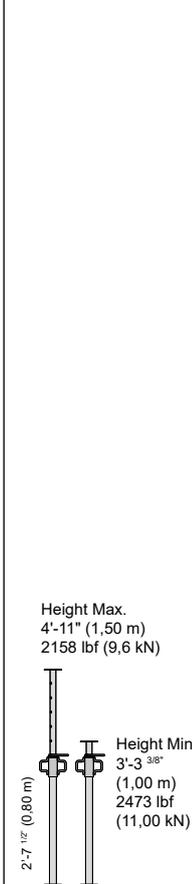


\*\* The 19'-8 1/4" (6 m) Post-shore can be used in either direction without affecting its performance.

\* The Table on the following page lists the data supplied by Applus.

#### Notes:

- The data for plumbs and post-shores with centered vertical load.
- At the same time as assembly, always carry out a revision of the material in order to check its suitability for use.

 <p>Height Max. 19'-8 1/4" (6,00 m) 2270 lbf (10,10 kN)</p> <p>16'-4 7/8" (5,00 m) 2990 lbf (13,30 kN)</p> <p>Height Min. 19'-8 1/4" (3,60 m) 7464 lbf (33,20 kN)</p> <p>10'-4" (3,15 m)</p>	 <p>Height Max. 19'-8 1/4" (5,20 m) 1910 lbf (8,50 kN)</p> <p>4.25m height 13'-11 3/8" (4,20 m) 3530 lbf (15,70 kN)</p> <p>Height Min. 11'-7 3/4" (3,55 m) 5283 lbf (23,50 kN)</p> <p>6'-7 1/8" (1,84 m)</p>	 <p>Height Max. 13'-1 1/2" (4,00 m) 1349 lbf (6,00 kN)</p> <p>3.20m height 10'-6" (3,20 m) 3192 lbf (14,20 kN)</p> <p>Height Min. 8'-7 1/8" (2,45 m) 3687 lbf (16,40 kN)</p> <p>6'-2" (1,88 m)</p>	 <p>Height Max. 10'-2" (3,10 m) 2270 lbf (10,10 kN)</p> <p>7'-10 1/2" (2,40 m) 4047 lbf (18,00 kN)</p> <p>Height Min. 5'-10 7/8" (1,80 m) 4474 lbf (19,9 kN)</p> <p>5'-8" (1,54 m)</p>	 <p>Height Max. 4'-11" (1,50 m) 2158 lbf (9,6 kN)</p> <p>Height Min. 3'-3 3/8" (1,00 m) 2473 lbf (11,00 kN)</p> <p>2'-7 1/2" (0,80 m)</p>	
19'-8 1/4" (6 m) Post-Shore**	16'-4 7/8" (5 m) Post-Shore	13'-1 1/2" (4 m) Post-Shore	9'-10 1/8" (3 m) Post-Shore	4'-11" (1.5 m) Post-Shore	Type of post-shore
63025	64029	64005	64003	64007	Product code
2 3/8" (60.3)	2 1/4" (60)	1 7/8" (48)	1 7/8" (48)	1 7/8" (48)	Ø Body tube mm
1/8" (2.7)	1/16" (2)	1/16" (2)	1/16" (2)	1/16" (2)	Body thickness mm
1 7/8" (48.3)	2 1/16"	1 5/8" (41)	1 5/8" (41)	1 5/8" (41)	Ø Tube mm
3/16" (4)	1/8" (2.5)	1/8" (2.5)	1/8" (2.5)	1/16" (1.8)	Tube thickness mm
68.2 pounds (31)	40.9 pounds (18.58)	24.8 pounds (11.25)	22 pounds (10)	12 pounds (5.48)	Tube thickness mm

- Manufactured with high quality steel tube S275JR (ST-44).
- The bases, the thread and the pin are also made of steel.
- Both the body and the tube of the post-shore are painted in polyester paint in order to protect them from outdoor conditions, prolonging their use on site.



## Alisan Tripod

Support element for the Alisan Post-shore or for conventional telescopic post-shores. Alisan Tripod helps in the setting up of the floor and can be used with all of Alsina's slab formwork systems. It is very simple to position as it has a closing system with no need to use threaded parts; one hit of a hammer closes and opens the hook ensuring the stability of the post-shores during the setting up of the floor.