




RIVESTOP

basics⁺ **Alsina**

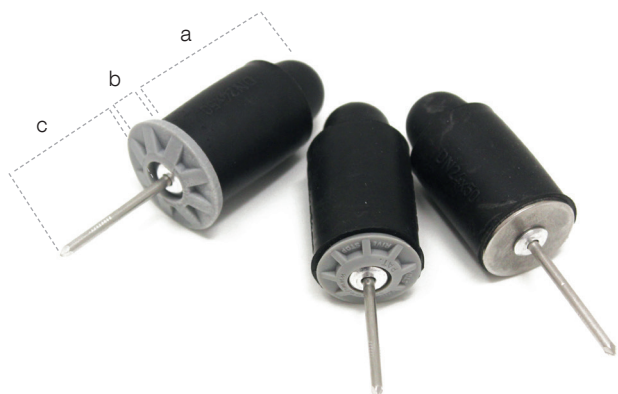

Hermetic sealing system that allows waterproofing the through-holes of the concrete walls, created after the extraction of the formwork system.

Product awarded for its contribution to innovation, patented by RiveStop System S.L.

Part	Materials	Dimensions	
c	Stainless steel	27-33	[mm]
	Zinc-plated steel		
b	Plastic	5	[mm]
	Stainless steel	2	[mm]
a	EPDM rubber	Ø17-Ø30	[mm]
		33-50	[mm]

Advantages

- Quick and safety in its installation. From 1 to 4 seconds per hole depending on the riveter used.
- Keeps its proprieties unchanged against aging.
- Guarantees a tight seal with up to 8 bar pressure.
- Maximum resistance against other risk factors such as noise, fire or radon gas.
- Savings in labor, in reprocessing and rework.
- Placing a single piece is enough by using the appropriate piece and following the manufacturer's technical instructions.

Code	Description
74159	RiveStop 5B PS 21/24 (multiple of 160 units).
74160	RiveStop 3B PZ 21/24 (multiple of 180 units).

Application		
Sealing hole range	Ø17-Ø35	[mm]
Water pressure	3-8	bar
Fire resistance	240	EI
Radon gas tightness	33-50	R


Packing
• Cubes of 25l, 10l y 4l

Necessary tools	
Our riveter machines are designed to provide the solution that best suits the needs of each project.	
74156	Manual Riveter RiveStop
74157	Electric Riveter RiveStop


Installation:



1. Insert RiveStop into the riveter.



2. Insert into the hole to be sealed.



3. Riveting up to cut the rod.